
TDG40 LINE BORING MACHINE



Note:

- 1. Electric Motor, Elbenstock, Made in Germany
- 2. Axial Feed Travel can be customized, but Max is 500mm

Boring bar	Ø40*1500mm
Boring diameter	Ø45-Ø200mm
Boring rpm	0-450rpm
Electric Motor	220V/110V,50/60HZ,1250W
Axial Feed Travel	300mm
Feed Rate	0-0.5mm/rev
Dimension & Weight	80 x 40 x 45 cm(68kg) + 156 x 9 x 9 cm(16kg)
Package	Wooden Package

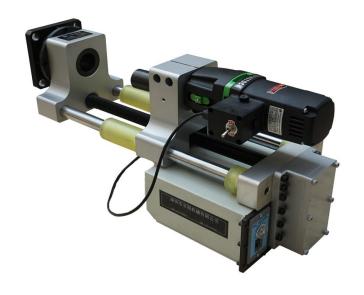

TDG40 LINE BORING MACHINE

Functions

- Conventional Boring
- Line Boring
- Drilling, Trepanning
- Threading
- Facing
- Grooving

Typical Applications

- Heavy equipment repair
- Stern tube boring
- Wicket gate repair on dams
- Bridge building/re-building
- Turbine coupling boring
- Bearing seat repair

- Engine block repair
- Presses repair
- Valve body repair
- Pump body boring
- Large fab bore alignment
- Excavator, crane, bulldozer, backhoe







BORE MEASURING TOOL



Part Number: 40T-110V-15

- Digital calipers
- Used to measuring cutting tool out the length of boring bar
- Fit to 40mm bar

ON SITE APPLICATION




TDG40 BORING BAR











Part Number: 40-40-001

Chrome plated Boring Bar,Ø40*1500mm,boring diameter: Ø45-200mm


Tool holes spaced every 200mm, tool holes: 12*12mm

• Fit toØ40mm bar

• 12*12mm square cutter


Boring diameter: Ø45-200mm

FACING HEAD (Optional)



>>> FACIN HEAD

Facing diameter: 50-260mm Optional(If need, please choose)

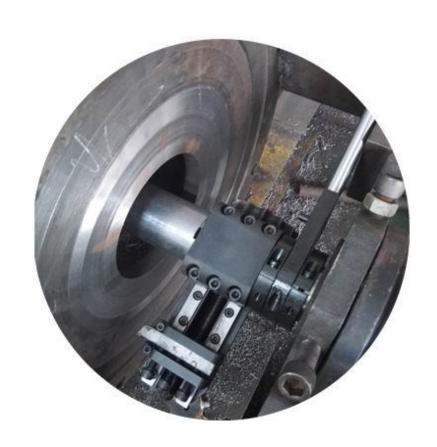

STANDARD EQUIPMENTS

1	Boring Bar : Ø40*1500mm	1 PC
2	Feed system	1 SET
3	Taper sleeve	1 SET
4	Support unit	1 PCS
5	Limit block	2 PCS
6	Square Cutter	2 PCS
7	Power Unit:1250W,230V/110V ,50/60HZ	1 PCS
8	Mounting Options	2 SET
9	Special Tools	1 SET
10	Bore Heads	2 PCS
11	Bore measuring tool: Digital Calipers 40mm bar	1 PCS
12	Tool Pack	1 SET
13	Manual operation, DVD	1 SET
14	Wooden Packing case	2 PCS

SHENZHEN DTH MACHINES CO.,LTD

Lantian Industrial Park Haoxiang Road Shajing Town Shenzhen China

TEL:86755-33238068 FAX:86755-33238950

Mobile&Whatsapp: +86 151 7253 8997

MAIL:sales5@dthmachines.com

www.dthmachines.com